

Portable Bulk Chemical Transfer System



57D Series

FEATURES & BENEFITS

Portable bulk transfer system
12/24-Volt DC, self-priming
20 ft. Cable, electronic flow meter
Positive-displacement diaphragm pump
Alligator clips and inline fuse
The maximum flow rate reaches 60L/M



Standard accessories

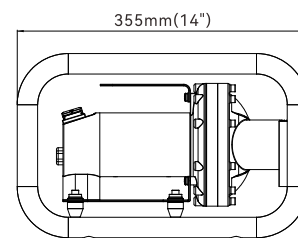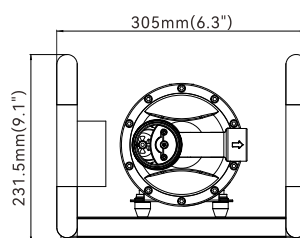

57F004
1" Swivel Joint



2NPT to
S60 thick wire



S60 thick
wire to 1NPT



Single lug
electrodeless clamp



57GS02
1" Pagoda inlet
screen cover



Filter 57S01



57F003*1
1" Barb X 1NPT




57F002*1
1NPT X 1NPT



57F001*2
1" Barb X 1NPT

PUMP PERFORMANCE

Current (A) Flow (LPM)

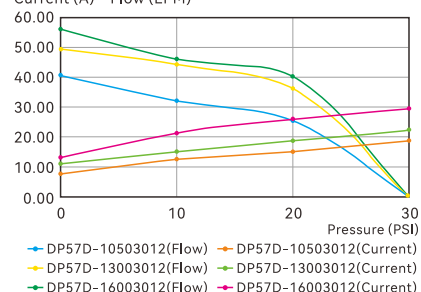

Model	DP57D-10503012		DP57D-13003012		DP57D-16003012	
Pressure PSI	Flow LPM	Current A	Flow LPM	Current A	Flow LPM	Current A
0	38	6.7	49.50	11	56.20	13
10	26	13	44.40	15.1	46.20	21.5
20	20	15.8	36.30	18.7	40.30	26
30	0.00	18.6	0.00	22.2	0.00	29.4

Standard Pump Configurations

Model	Pressure switch	Voltage	Cable length	Remarks	Pump head inlet and outlet
DP57D-10503012	None	12V	6m with alligator clips	kits	Right angle inlet and outlet
DP57D-10503024	None	24V	6m with alligator clips	kits	Right angle inlet and outlet
DP57D-13003012	None	12V	6m with alligator clips	kits	Right angle inlet and outlet
DP57D-13003024	None	24V	6m with alligator clips	kits	Right angle inlet and outlet
DP57D-16003012	None	12V	6m with alligator clips	kits	Right angle inlet and outlet
DP57D-16003024	None	24V	6m with alligator clips	kits	Right angle inlet and outlet